



Installation Instructions Windshield Retainer

Vehicle Application:

CJ5 1976-1983

CJ7 1976 - 1983

Jeep Scrambler 1981 - 1986

Jeep Wrangler 1986 - 1995

Toyota Landcruiser 1964 - 1984

Part Number: 51209

Installation Tips

Before you begin installing your new Windshield Retainer, please read all the instructions thoroughly.



WARNING

Do not rely in any way on the components of this product to protect against injury or death in the event of an accident. Never operate the vehicle in excess of manufacturer's specifications.

Read and follow, precisely, all installation instructions provided when installing this product. Failure to do so may result in a poor fit and could place occupants of the vehicle in a potentially dangerous situation.



This product is only designed for the vehicles listed above. Failure to install this product on the proper vehicle could cause injury to the vehicle occupants and damage to the vehicle and/or product.



CAUTION

Safety glasses should be worn at all times when installing this product.

WEAR SEAT BELTS AT ALL TIMES

Tools



Safety Glasses



Pencil



Phillips Head Screwdriver



Hammer



Center Punch



Power Drill



1/8" Drill Bit

Installation Time



30 Minutes

Skill Level



2 - Moderatly Easy

Support

We're here to help! Go to:

<https://www.bestop.com>


and click on Need Help?




<https://www.bestop.com/video-library>



Parts List

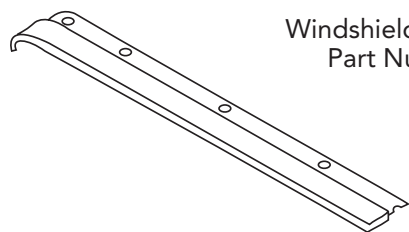

Windshield Retainer - Right
Part Number 225.44
Qty 1


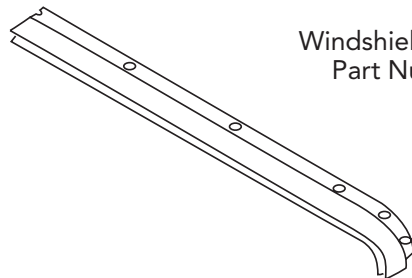


Windshield Retainer - Left
Part Number 225.43
Qty 1




#8 x 1/2" Pan Head Washer Screw
Part Number 200.48
Qty 13

Center the Windshield Retainers on top of the windshield frame.

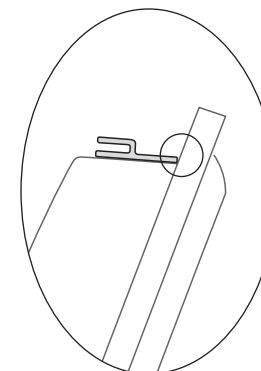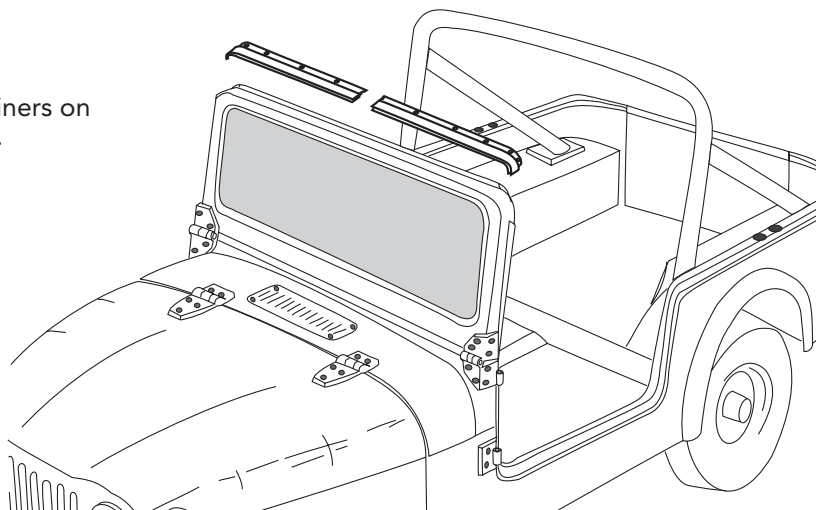

Butt the retainers up against the top lip of the windshield frame.

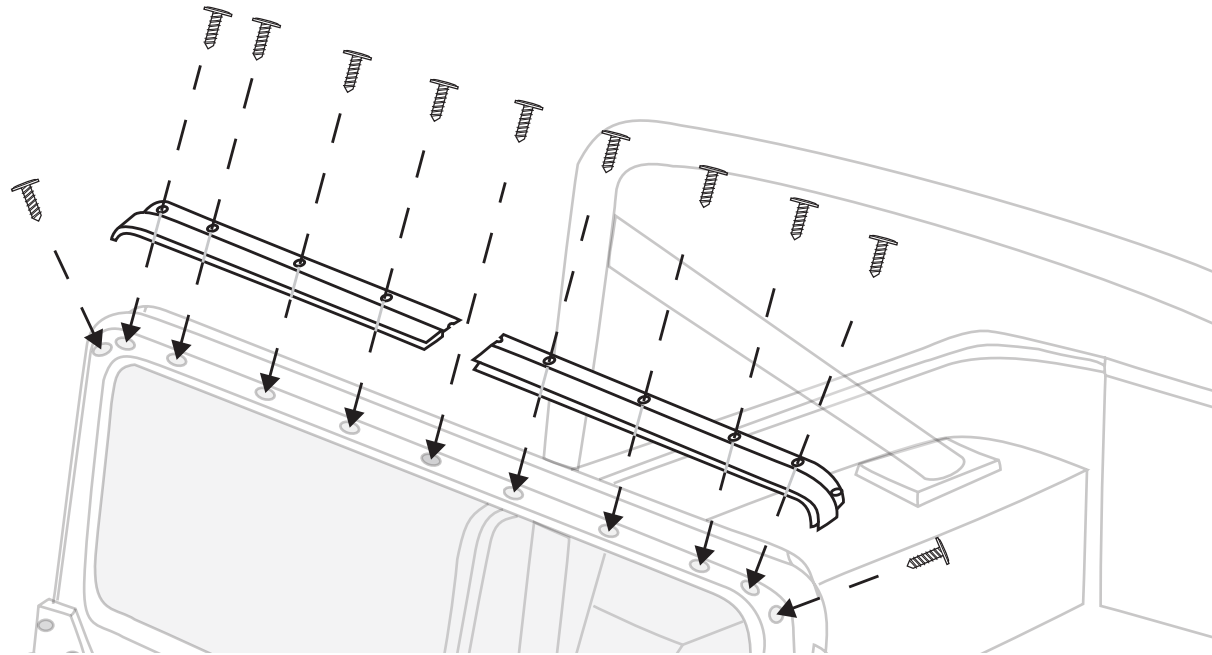

Use the retainers as a template to mark, center punch and drill eleven (11) 1/8 inch holes. (Note: drill one 1/8 inch hole between the two halves of the retainer) Use eleven (11) #8 x 1/2 inch Pan Head Washer Screws.

CAUTION

A loose windshield retainer may allow the top to disengage from the windshield causing damage to the top and possible injury to the occupants of the vehicle. Be certain that the windshield retainer is securely fastened to the windshield at the time of the first installation. Check the tightness of the mounting screws every three months. (Do not overtighten)

For Bestop Warranty Information, Please go to;
<https://www.bestop.com/help/warranty-information/>

