



# INSTALLATION INSTRUCTIONS


## 2021+ Bronco Tailgate Lockbox #378-01

Please read and fill out the enclosed warranty card or register online at <https://tuffyproms.com/help/warranty-information/warranty-registration/> to activate your warranty.

### QC CHECK

\_\_\_\_ SHIP PACK CONTENTS  
\_\_\_\_ VISUAL INSPECTION  
\_\_\_\_ RUBBER SEALS  
\_\_\_\_ LOCK FUNCTION TEST  
\_\_\_\_ SHIPPING/KEY PACK

### PARTS CHECKLIST

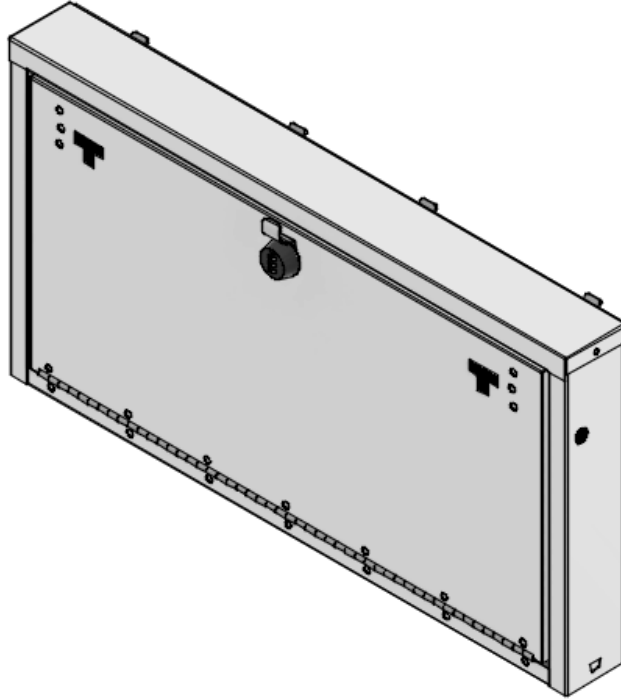

LOCKBOX #378-01


### SHIPPING PACKAGE CHECKLIST



#1.1 "Double" D-Seal



#1.2 (4) Mounting Bracket



#1.3 (4) 1/4-20 Hexwasher Serrated Flange Nut

### Tools needed for standard installation

• Panel Removal Tool


• 11mm Socket Wrench or Ratchet

### PLEASE READ ALL INSTRUCTIONS THOROUGHLY BEFORE STARTING INSTALLATION.


1. Remove all the contents from the shipping box and confirm that you have all the items listed above.

2. Take the (2) #1.1 D-Seal and apply to the back of the #378.  
**See Figure 1**

**NOTE:** The D-seal should be placed as close to the top and bottom of the Lockbox as practical.

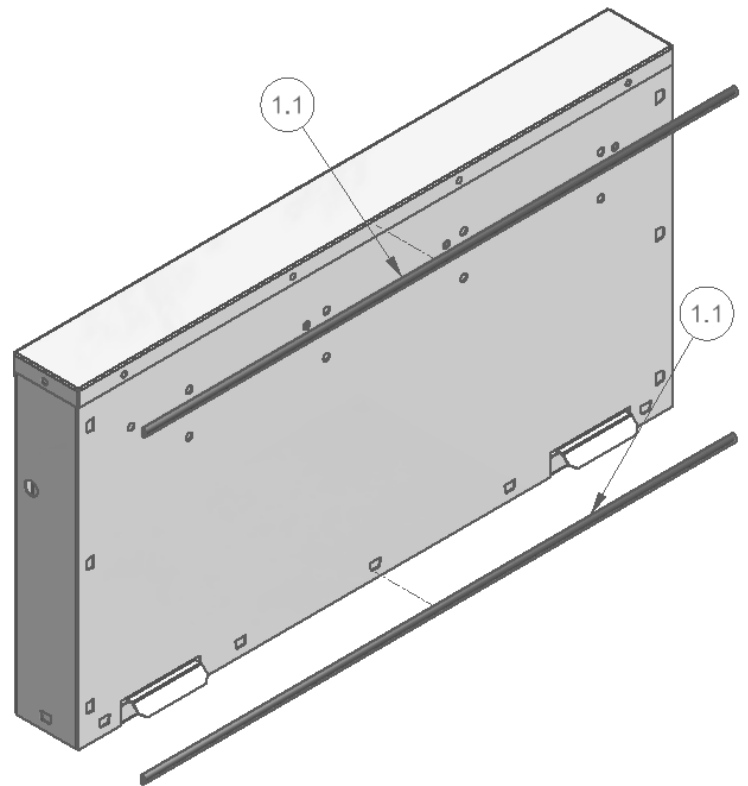


3. Open the tailgate and remove the trim panel from the inner surface, by lifting at the bottom of the panel.  
**See Figure 2**

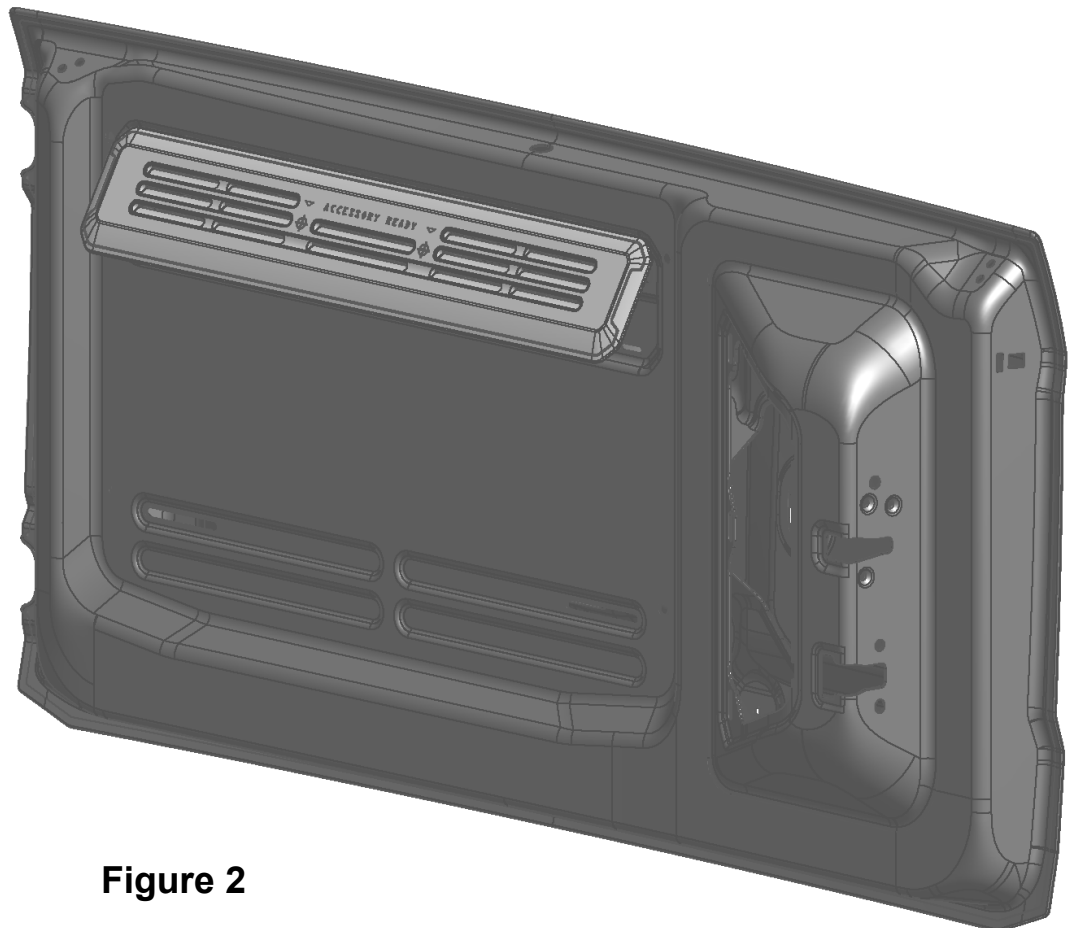


**Figure 2**

4. Insert the studs of the (4) #1.2 into the holes into the back of the #378. See **Figure 3A**
5. Screw on the (4) #1.3 Hex Washers onto the end of the studs but only tighten so the end of the stud is flush with the top of the nut. See **Figure 3A**
6. Insert the tabs on the bottom of the #378 into the two slots on the bottom side of the tailgate so the #378 can rest on the tailgate. See **Figure 3B**

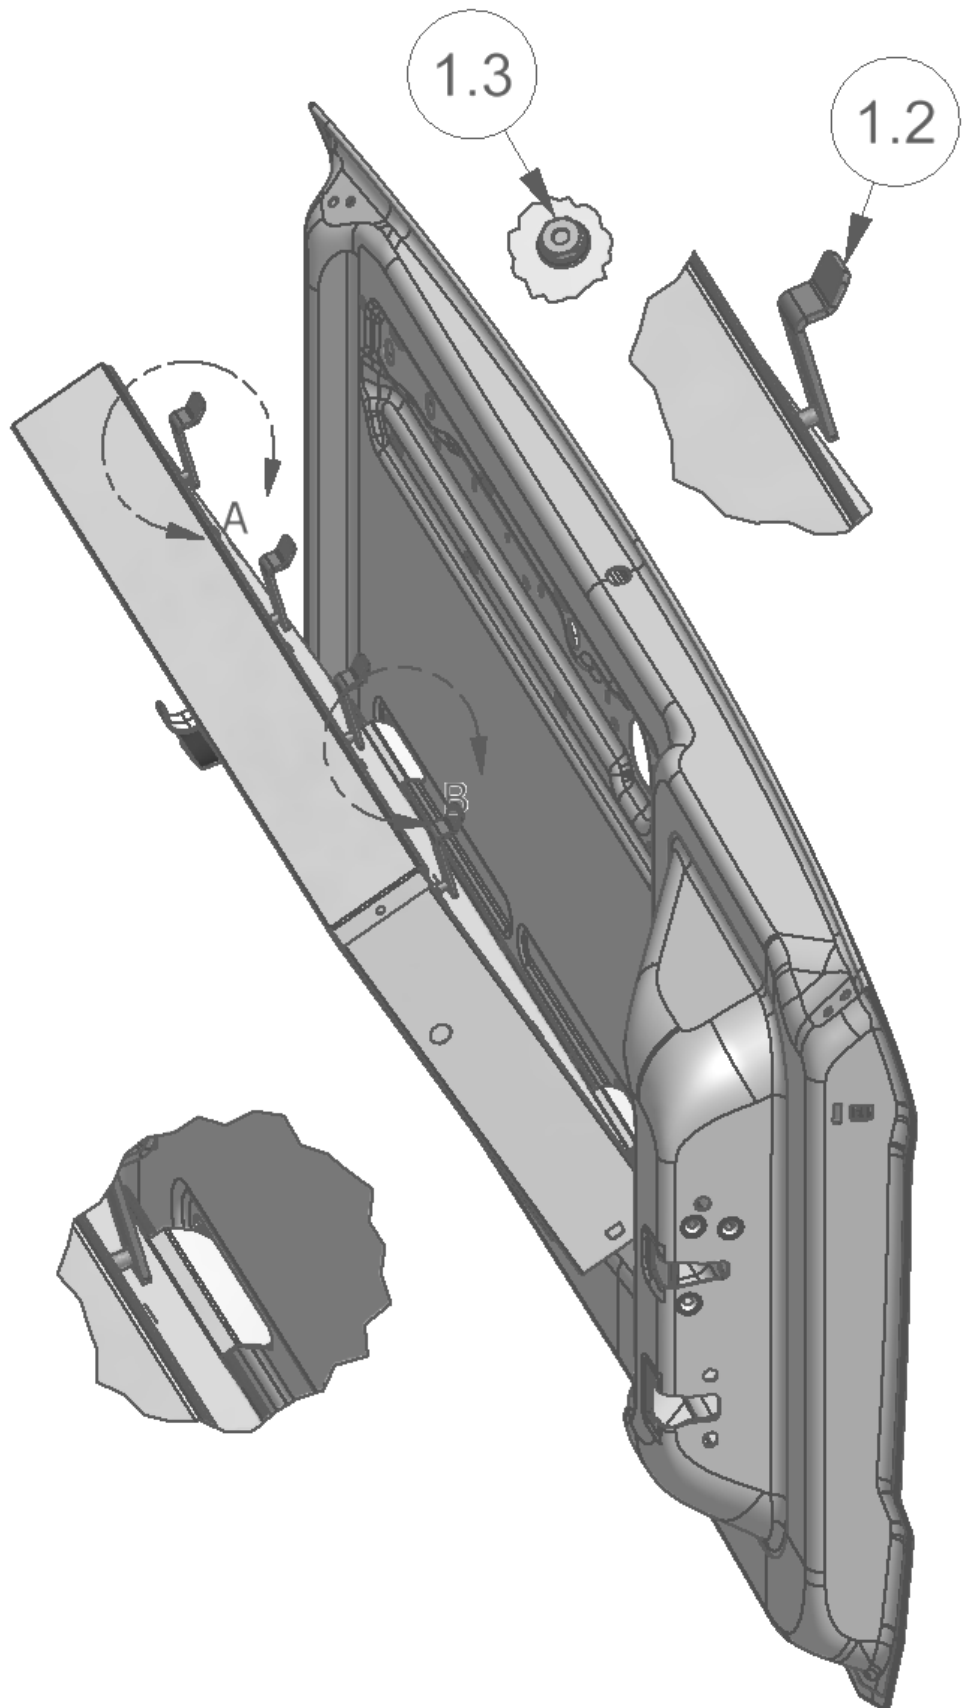

7. Rotate the #378 up close to the tailgate. **See Figure 6**
8. Move the #1.2 Mounting Brackets into the four slots in the top of the tailgate. **See Figure 6**
9. Once all four #1.2 Mounting Brackets are in place, tighten the nuts on the inside of the box.

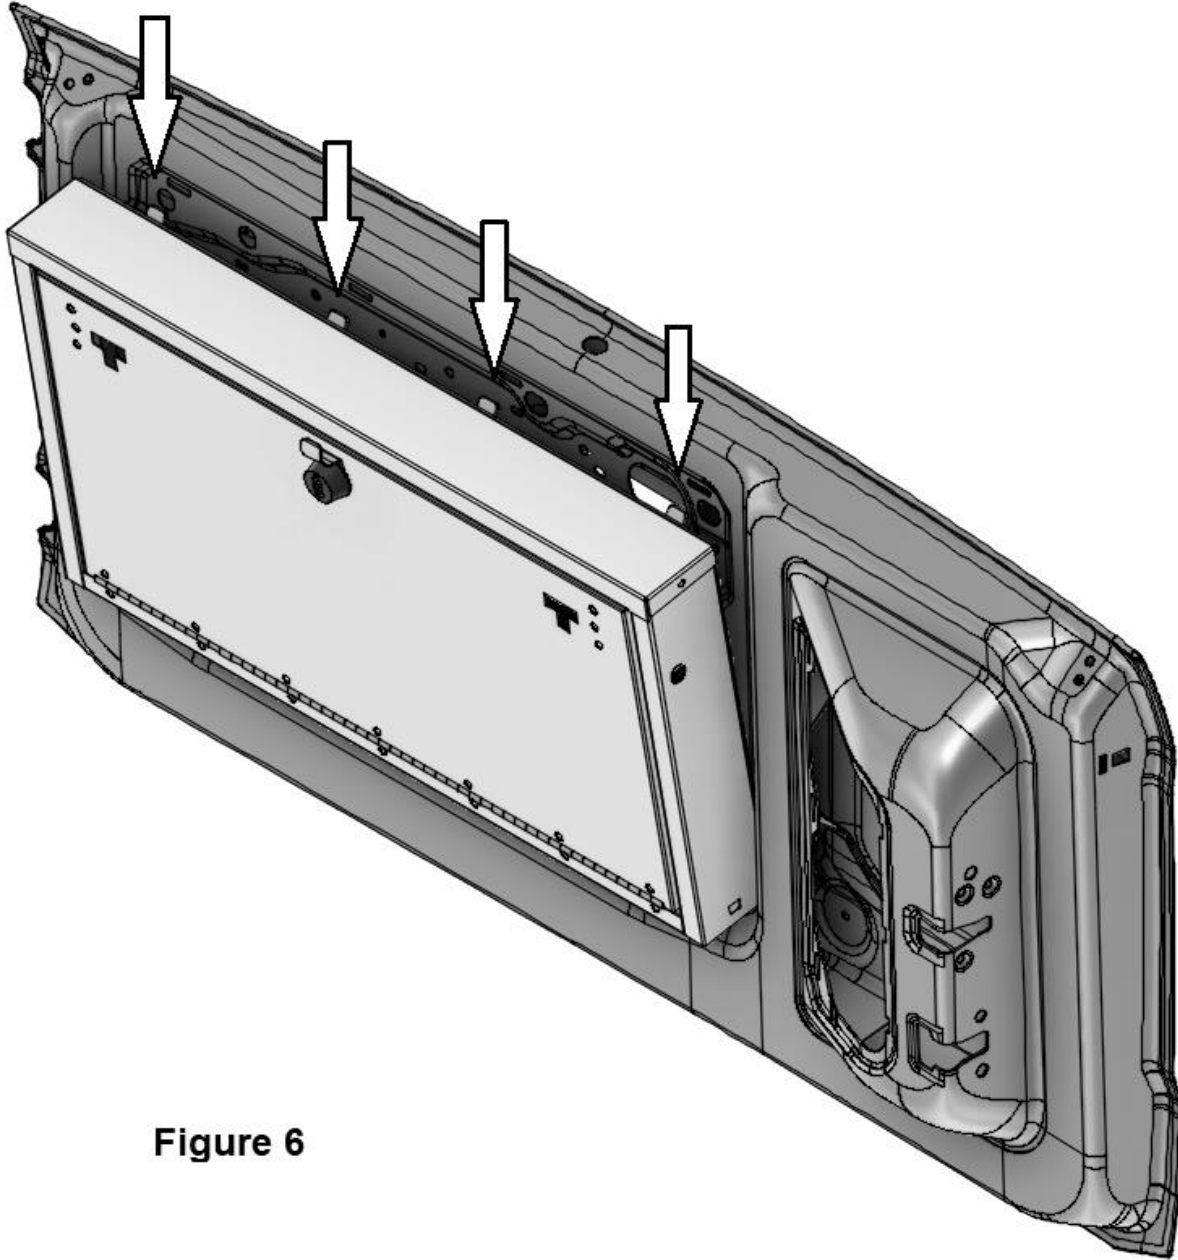

**Figure 6**

**CAUTION:** Lid may be used as a table but should not be loaded beyond 40lbs (18 kg).